



# Digital Multimeters

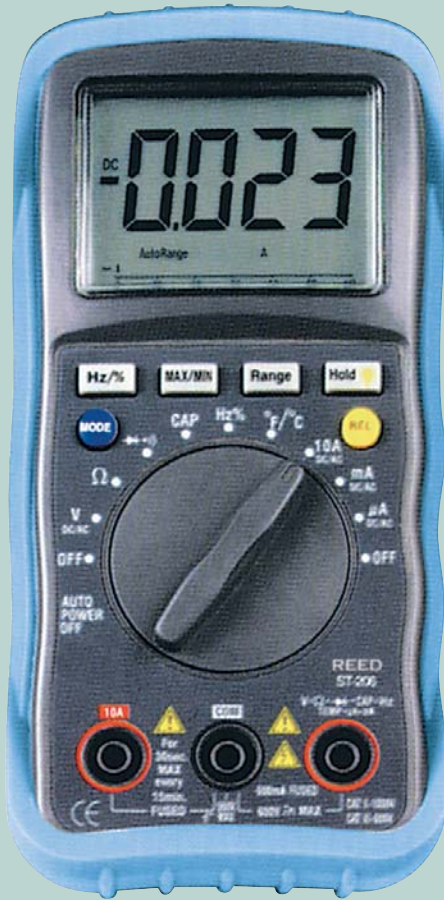

Please see pages 78-81 for our complete line of multimeter accessories.

**\$49**  
**ST-201**

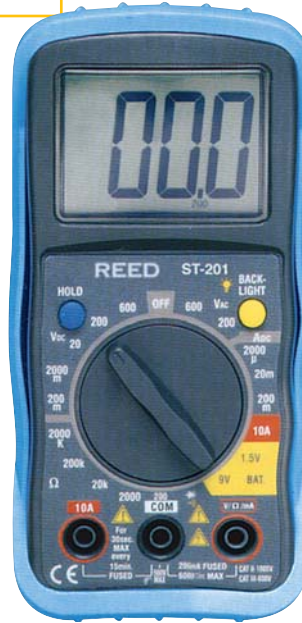


**Model ST-201**

**Basic Digital Multimeter.**

- DC current to 10A
- Data Hold & Relative function
- Resistance 2000Ω
- Diode check & continuity functions
- Auto power off
- 2000-count LCD display with backlight

**\$95**  
**ST-202**

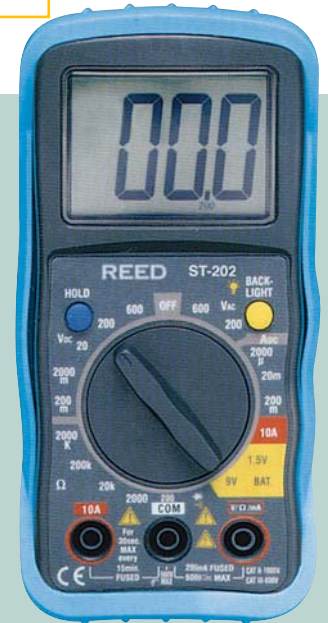

**Model ST-202**

**AC/DC Autoranging Digital Multimeter with Temperature.**

- Temperature Function: 760°F/400°C
- AC/DC current to 10A
- Auto & Manual ranging
- Data Hold & Relative function
- Resistance to 40MΩ
- Diode check & continuity functions
- Auto shut off
- 4000-count LCD display with backlight

**Specifications**

**Model**

- AC Current Range
- DC Current Range
- AC Voltage Range
- DC Voltage Range
- Resistance
- Capacitance
- Frequency
- Temperature Function
- Display
- AC True RMS
- Dimensions
- Weight
- Included Accessories
- Price

**ST-201**

- 
- 10 A
- 600 V
- 600 V
- 2000 Ω
- 
- 
- 
- 2000-count LCD w/ backlight
- No
- 5.75 x 2.6 x 1.65"/146 x 66 x 42 mm
- 7.05 oz/200 g
- Test leads & protective holster
- \$49**

**ST-202**

- 10 A
- 10 A
- 600 V
- 600 V
- 40 MΩ
- 200 μF
- 9.999 MHz
- Max. 760°F/400°C
- 4000-count LCD w/ backlight
- No
- 5.75 x 2.6 x 1.65"/146 x 66 x 42 mm
- 7.05 oz/200 g
- Test leads & protective holster
- \$95**

# Digital Multimeters

**\$110**  
**ST-202T**



**Model ST-202T**

**True RMS AC/DC Digital Multimeter with Temperature.**

- True RMS measurements
- Temperature Function: 760°F/400°C
- AC/DC current to 10A
- Auto & Manual ranging
- Data Hold & Relative function
- Resistance to 40MΩ
- Diode check & continuity functions
- Auto shut off
- 4000-count LCD display with backlight

**\$156**  
**UT60C**



**Model UT60C**

**A general DMM offering a variety of functions including temperature measurement.**

- Autorange and manual selectable
- Temperature measurement in °C
- Relative mode
- Data Hold
- Ergonomic design for ease of use
- Backlit - high visibility display
- Low battery indicator

## Accessories



- Model CA-03 Vinyl Carrying Case Price \$18**
- Model CA-05A Fabric Carrying Case Price \$21**
- Model CA-52A Fabric Carrying Case Price \$15**




**Model AC-006**      **Model AD-1**



**Model 518-6**

- Model AC-006 AC Line Splitter Price \$20**
- Model AD-1 Temperature Adaptor Price \$12**
- Model 518-6 Test Leads w/ alligator clips Price \$22**

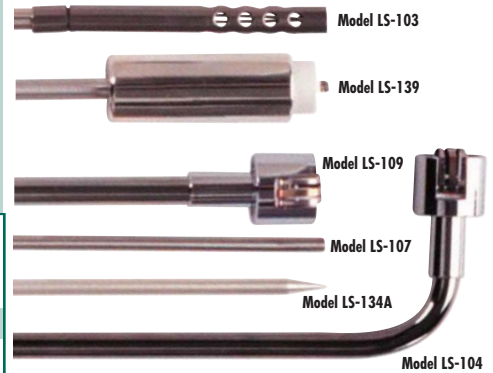

- Model LS-103 Air/Gas Probe, K-type (1472°F/800°C) Price \$88**
- Model LS-139 Surface Probe, K-type, Spring-loaded tip (932°F/500°C) Price \$88**
- Model LS-109 Surface Probe, K-type, Ribbon style (752°F/400°C) Price \$78**
- Model LS-107 General Purpose Immersion Probe, K-type (1292°F/700°C) Price \$78**
- Model LS-134A Needle Tip Penetration Probe, K-type (1472°F/800°C) Price \$78**
- Model LS-104 Surface Probe, K-type, Right angle style (752°F/400°C) Price \$98**

ST-202T
10 A
10 A
600 V
600 V
40 MΩ
200 μF
9.999 MHz
Max. 760°F/400°C
4000-count LCD w/ backlight
Yes
5.75 x 2.6 x 1.65"/146 x 66 x 42 mm
7.05 oz/200 g
Test leads & protective holster
<b>\$110</b>

UT60C
400μA, 4000μA, 40mA, 400mA, 4A, 10A
400μA, 4000μA, 40mA, 400mA, 4A, 10A
4V, 40V, 400V, 750V
400mV, 4V, 40V, 400V, 1000V
40 MΩ
40nF - 100μF
10Hz - 10 MHz
Yes
-
-
12oz /340g
Test leads, battery manual, contact temperature probe and test clips
<b>\$156</b>

# Digital Multimeters

## Full-featured DMMs

A full range of digital multimeters featuring models with:

- True RMS Measurement
- Harmonics Index Function
- Safety Shutter
- Large Digital Display with Bargraph
- Auto Ranging

## Accessories

Model CA-03 Vinyl Carrying Case Price \$18

Model CA-05A Fabric Carrying Case Price \$21

Model LS-103 Air/Gas Probe, K-type (1472°F/800°C)  
Price \$88

Model LS-139 Surface Probe, K-type, Spring-loaded tip (932°F/500°C)  
Price \$88

Model LS-109 Surface Probe, K-type, Ribbon style (752°F/400°C)  
Price \$78

Model LS-107 General Purpose Immersion Probe, K-type (1292°F/700°C)  
Price \$78

Model LS-134A Needle Tip Penetration Probe, K-type (1472°F/800°C)  
Price \$78

Model LS-104 Surface Probe, K-type, Right angle style (752°F/400°C)  
Price \$98

Model TP-01 Naked Bead Probe, K-type (500°F/260°C)  
Price \$19

Please see pages 78-81 for our complete line of multimeter accessories.

**\$95**  
**ST-2008**



**Model ST-2008**

### Digital Multimeter.

- 2000-count, LCD display with backlight
- Full overload protection on all ranges
- Data hold
- Diode check & continuity (30Ω)
- Temperature function to 1400°F/760°C
- Supplied with battery

**\$110**  
**ST-2009**



**Model ST-2009**

### Autoranging Digital Multimeter.

- 4000-count, LCD display with backlight
- Autoranging function
- Full overload protection on all ranges
- Data hold
- Diode check & continuity (30Ω)
- Temperature function to 1400°F/760°C
- Supplied with battery

## Specifications

Model	ST-2008	ST-2009
AC Voltage Range	700 V	700 V
DC Voltage Range	1000 V	1000 V
AC/DC Current Range	20 A	20 A
Resistance	20 MΩ	40 MΩ
Capacitance	200 μF	100 μF
Frequency	20 kHz	9.999 MHz
Continuity	Yes	Yes
Diode Test	2.8 V	2.8 V
Temperature Function	1400°F/760°C	1400°F/760°C
Display	2000-count LCD w/ backlight	4000-count LCD w/ backlight
Dimensions	7.6 x 3.6 x 1.5"	7.6 x 3.6 x 1.5"
Weight	13.5 oz	13.5 oz
Price	<b>\$95</b>	<b>\$110</b>

# Digital Multimeters

**\$180**  
**K5060**



**Model K5060**

**Autoranging Digital Multimeter.**

- Autoranging
- hFE & diode VF functions
- Continuity beeper
- Overload protection
- Automatic zero adjustment
- Automatic polarity indication
- Data hold
- Function annunciation on LCD display with bargraph
- Low battery indicator
- Supplied with battery

**\$155**  
**K5030**



**Model K5030**

**Basic Digital Multimeter.**

- Multi-function measurement: ACV, DCV, ACA, DCA, resistance, diode, hFE
- 3-fuse overload protection, even on 10A range
- 3-1/2 digit, 0.7" high LCD
- Automatic zero adjustment
- Automatic polarity indication
- Drop proof
- Supplied with battery

**\$218**  
**K5040**



**Model K5040**

**Digital Multimeter with Temperature.**

- Multi-function measurement: ACV, DCV, ACA, DCA, resistance, diode, hFE
- Capacitance & frequency measurement functions
- Continuity beeper
- Temperature capability with type K thermocouple probe
- 3-fuse overload protection, even on 10A range
- 3-1/2 digit, 0.7" high LCD
- Automatic zero adjustment
- Automatic polarity indication
- Drop proof
- Supplied with battery

K5060	K5030	K5040
3.5 mV to 750 V	200 mV, 2, 20, 200, 750 V	200 mV, 2, 20, 200, 750 V
320 mV to 600 V	200 mV, 2, 20, 200, 1000 V	200 mV, 2, 20, 200, 1000 V
25 µA to 10 A	200 µA to 10 A	200 µA to 10 A
32 MΩ	200 Ω to 20 MΩ	200 Ω to 20 MΩ
-	-	-
< 20 MΩ	-	200 Hz to 20 kHz
Yes	Yes	< 20 MΩ
-	-	Yes
LCD with analog bargraph	3-1/2 digit LCD	-40 to 1832°F/-40 to 1000°C
6.8 x 3.3 x 1.4"	7.3 x 3.4 x 1.5"	3-1/2 digit LCD
8.5 oz	8.5 oz	7.3 x 3.4 x 1.5"
<b>\$180</b>	<b>\$155</b>	8.5 oz
		<b>\$218</b>

# Digital Multimeters

## Digital Multimeters

We offer a wide variety of full-featured DMM's (Digital Multimeters). These high performance meters are designed to be used in demanding industrial and electronic applications.

These compact DMM's are designed to fit in the palm of your hand. Covering a wide range of measurements, they are our most popular tool in the industry.

**\$195**  
**ST-9933**



**\$40**  
**M320**



## Accessories

Please see pages 78-81 for our complete line of multimeter accessories.

### Model ST-9933

A full-function autoranging DMM offering True-RMS AC measurement.

- True RMS
- Safety warning: Audible & visual alarms alert user if test lead connections do not match function selected
- High contrast LCD with backlight
- Data hold & Auto shut off
- CAT III 1000V

### Model M320

A card-size, full-function DMM that fits easily into your pocket.

- Measure AC & DC voltages, AC & DC current, resistance, diode, & perform audible continuity checks with accuracy
- Small & lightweight, with a carrying case & test leads wound on its body
- Auto power-off function extends the battery life.
- Accuracy is guaranteed for 1 year, 73°F ±3°F, less than 75% RH

## Specifications

Model	ST-9933	M320
AC Current Range	20 A	40 mA to 400 mA
DC Current Range	20 A	40 mA to 400 mA
AC Voltage Range	750 V	600 V
DC Voltage Range	1000 V	600 V
Resistance	40 MΩ	40 MΩ
Capacitance	100 μF	100 μF
Frequency	9.999 MHz	-
Continuity	30 Ω	Yes
Diode Test	Yes	Yes
Temperature Function	1832°F/1000°C	-
True RMS	Yes	No
Display	4000-count LCD w/ backlight	4000-count LCD w/ backlight
AC Current Accuracy	±1.5% of reading	±3.0% of reading
DC Current Accuracy	±1.2%	±2.0% of reading
AC Voltage Accuracy	±0.8%	±0.8% of reading
DC Voltage Accuracy	±0.5%	±0.8% of reading
Dimensions	7.75 x 3.5 x 1.6"/197 x 88 x 41 mm	4.7 x 2.6 x 0.5"/120 x 66 x 12 mm
Weight	22.4 oz/635 g	4.0 oz/115 g
Price	<b>\$195</b>	<b>\$40</b>