

DFS Series Digital Force Gauge With Integral Loadcell

The CHATILLON® DFS Series offers the best price performance of any digital force gauge available today. This compact, easy-to-use force gauge is designed for basic and complex applications. Ideal for handheld or test stand applications, the DFS may be equipped with integral loadcells or smart remote sensors for load measurement or torque measurement. Measurement accuracy is better than 0.1% full scale. A large, easy-to-read, high resolution dot matrix LCD display supports a variety of standard gauge functions including normal and peak readings, high/low limits, setpoints, pass/fail results, statistical results, load averaging, load comparisons, % and sharp break detection, loadcell actuation and direction. Loads are displayed in ozf, gf, lbf, kgf and N units. The display can be inverted and displayed results may be "hidden" from the operator. The DFS gauge comes standard with an RS-232 cable, carrying case, battery adapter/charger, testing accessories and NIST Certificate of Calibration with data.

Features

- ❑ Eight Models and Capacities
- ❑ Advanced Operating Modes
 - Normal
 - Peak Tension and Compression
 - % or Sharp Break Detection
 - Load Comparisons & Load Averaging
 - Contact Closure
 - Load Limits
 - Pass-Fail Limits
- ❑ Statistical Calculations
 - Mean with Maximum and Minimum Values
 - Coefficient of Variation with Mean and Standard Deviation
 - Standard Deviation with Variance and Mean
 - % Differentiation
- ❑ Integral Loadcells
 - Accuracy $\pm 0.1\%$ Full Scale
 - Mechanical Overload Protection to 150% Full Scale
- ❑ Simple Operator Interface
 - High Resolution Display
 - Menus, Prompts and Function Keys for Easy Use
- ❑ Standard Outputs
 - RS232 Serial Data, Mitutoyo Digimatic, $\pm 2Vdc$ Analog
- ❑ NIST Calibration with Data
 - Available IEC/ISO17025 Cert with Uncertainty
- ❑ 2 Year Warranty




Medical Devices

Pharmaceuticals

Springs & Components

General Purpose Force

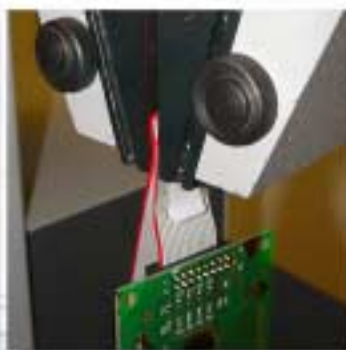

Because You Expect More from a Chatillon® Gauge...

Do More... Pay Less!

The new CHATILLON DF Series deliver more features without compromising ease of use, accuracy and very importantly costs to you. You'll do more with a DF Series and you'll get the reliability and quality that you come to expect from Chatillon force measurement instruments.

Easy-to-Read Display.

A large, easy-to-read dot matrix display contains can display up to 8 lines of information. The high resolution display features contrast adjustments and can be inverted when required. The display can even be "hidden" at the press of a button. A load bargraph indicated load direction, measured load and safe load and helps prevent overloads. The integral loadcells feature mechanical overload protection of 150% Full Scale.

Single Touch Operation.

The rubber keypad features dedicated and dynamic function keys. The function keys correspond to displayed options and guide the user during operation. A navigation pod lets you navigate through the menus and to scroll and change values quickly. The innovative "i" key can be used to display critical information on the gauge such as gauge capacity and resolution, battery life, loadcell overload history, even service information including last calibration date, or the location of service centers.

Data Outputs and Personal Computer Integration

The DFS features RS-232 and Mitutoyo Digimatic digital outputs. The gauge also features a ± 2 Vdc analog output. Measured values may be transmitted to an external device using a manual command at the gauge, or a measured value may be transmitted based on an externally driven command, e.g. from a personal computer or other serially interfaced device.



Comprehensive Results.

The rubber keypad features dedicated and dynamic function keys. The function keys correspond to displayed options and guide the user during operation. A navigation pod lets you navigate through the menus and to scroll and change values quickly. The innovative "i" key can be used to display critical information on the gauge such as gauge capacity and resolution, battery life, loadcell overload history, even service information including last calibration date, or the location of service centers.

Dependable Measurements.

The DF Series features an integral loadcell sensor that delivers repeatable, accurate results. The innovative load bargraph shows dynamic load, direction of load and warns you of pending overload conditions.

We Validate It.

The DF Series comes standard with a Certificate of Calibration with data certified to NIST. Frankly, a Certificate of Conformance isn't worth much! And we offer Calibration Certificates with uncertainty calculations since AMETEK is an ISO17025 accredited manufacturer.

Calibrate and Verify Status.

The DFE Series incorporates flash memory and hosts a set of self-diagnostic functions for monitoring the display, keypad and electronics. Using the "i" key, you have immediate access to battery conditions, including estimated battery life remaining. You can also view loadcell status, including the number of overloads that have been applied to the gauge. Zero offset verification is standard and a step-by-step calibration procedure is built-in allowing you to calibrate your DFE gauge with certified standards.

... You Get More from a Chatillon® Gauge.


Normal and Peak Modes

The DF digital gauge will display Normal and Peak tension and compression loads. Results may be displayed in ozf, gf, lbf, kgf or N units. Use the UNITS key to sequence through the available units. You may define and establish your Default Units during instruments setup. You can increase the size of the displayed information using the keypad.



High & Low Load or Pass-Fail Limits

The DF Series may be configured with High and Low Load Limits or Pass-Fail Limits. Load limits allow you to establish setpoints for your testing. If the gauge exceeds a setpoint value, the gauge can provide a visual and audible alarm. You can also setup the gauge to operate as a pass-fail system. You can setup a pass-fail limit based on a limit range or on a nominal value with a % bandwidth. Based on your setup, the gauge will provide you with a Pass-Fail indication.

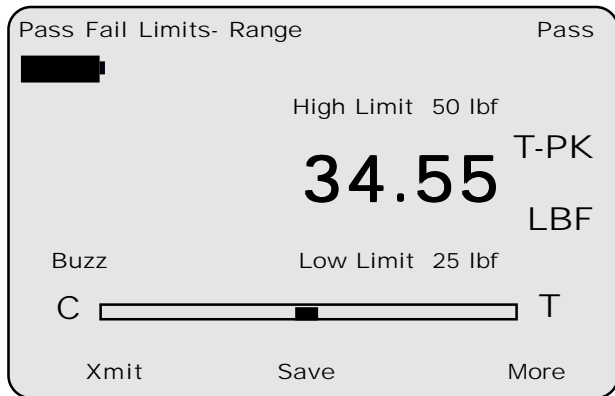


Contact Closure

The contact closure feature can be used to freeze the display at a load value equal to the "make" or "break" on an electrical contact.

Statistical Results


You may save and store up to 10 results in instrument memory for later recall or to calculate statistical results. The gauge labels each results and indicates memory capacity. The gauge will alert you when memory is full. Statistical results include:

- Calculate Mean and also show you the MAX and MIN values for your calculation
- Coefficient of Variation is calculated and displayed with the Mean and Standard Deviation value
- Standard Deviation is calculated and displayed with the Mean and the Variance value. Total Population and Sample (n-1) methods are supported
- Calculate and display % Difference between consecutive test results

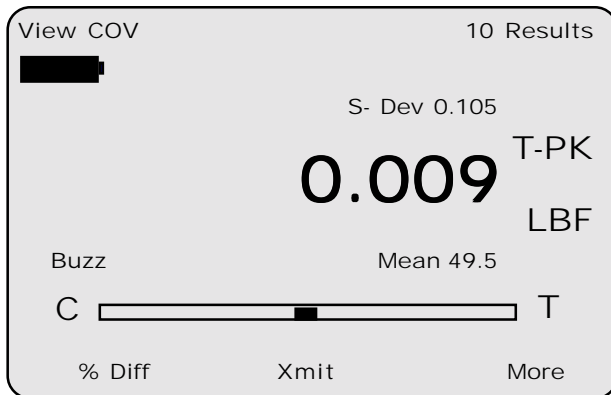

Simplified Setup

Menus and intelligent prompts make gauge setup fast and easy. Gauge options are presented in a "List Format". Using the navigation pod and function keys, you simply select the functions and parameters required. The gauge will guide you through the setup process. Default settings are provided and a "Quick Reset" allows you to re-establish defaults with a single key press. Using the standard RS232 output, you can print your gauge setup parameters for record archiving or to use as a setup template for other DFS force gauges in your plant.

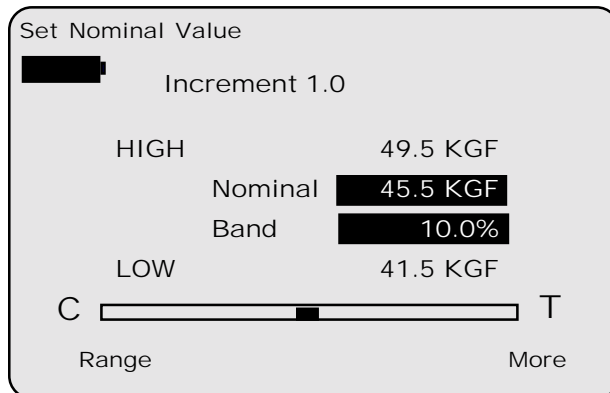


Load Averaging

Two methods of load averaging are standard with your DFS. Load averaging is useful to determining load characteristics of long test periods or for samples with characteristically noisy load readings.



Load Method

This method allows you to define a load threshold. The gauge will begin taking readings once the load threshold has been reached and will continue to take and average readings until the measured load falls below the threshold value.

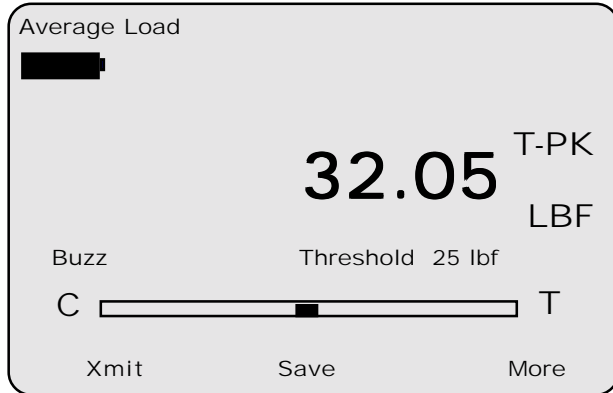

Percentage and Sharp Break Detection

Break detection is provided and two types of breaks are supported. A sharp break can be used to detect whenever the load measurement drops 5% from a peak load. Alternatively, you may override the sharp break and setup the gauge with a % break detector. The % break detector allows you to set the drop percentage that is used to define a break. This type of break is useful on samples with high elastic characteristics.

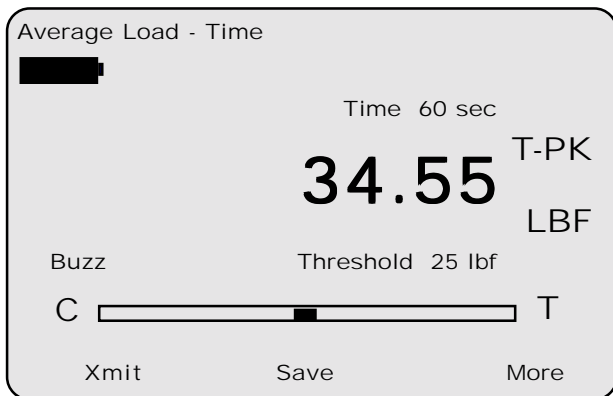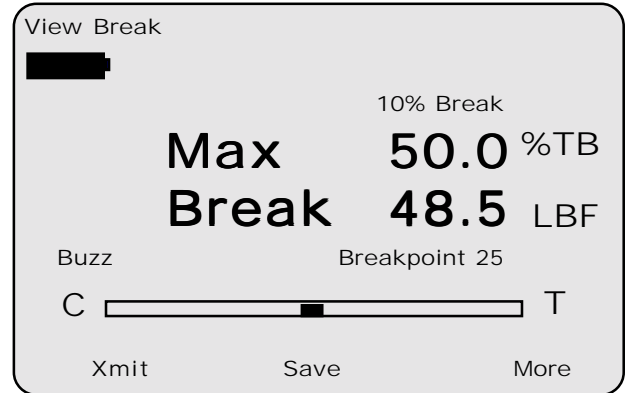


Time Method

The Time method allows you to establish your load averaging based on a load threshold and time duration. The load threshold determines the start of the averaging, while the time duration defines the length of the test period. The gauge will begin taking readings when the threshold is reached and will continue to take and average readings until the time duration has expired.

Load Comparison

Load comparisons of up to two sets of 5 results may be measured using the DFS. The gauge will measure and store up to 5 results for each of two tests (10 results). The gauge will then display the first set of results with the second set of results and calculate statistical relationships such as % difference, COV, variance and standard deviation. This feature is ideal for functional capacity testing.

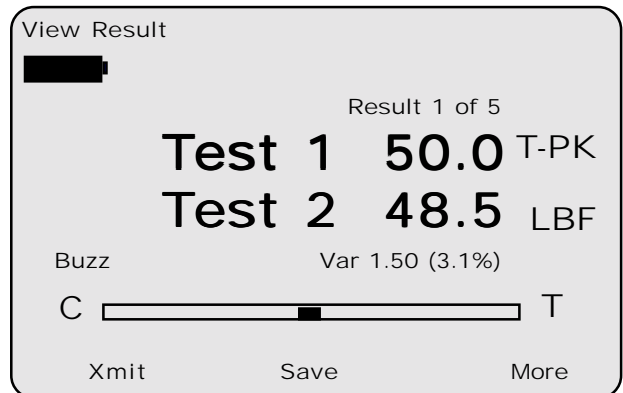

Specifications

Accuracy: $\pm 0.1\%$ of full scale

Certification: Calibration with NIST Data, IEC/ISO17025 optional

Data Sampling Rate: 5000 Hz

Peak Capture Rate: 5000 Hz

Display Update Rate: 10 Hz

Tare Capacity: 10% full scale

Overload Protection: 150% full scale

Display Characteristics: High resolution, dot-matrix LCD, 8 lines, 40 characters, adjustable contrast, invert and "hide" capability

Automatic Shut Down: Configurable time. May be disabled.

Data Storage: 10 results, Optional NEXYGEN™ software for unlimited storage and automated testing and analysis

Test Stand Control: Compatible with TCD Series testers.

Outputs: RS-232, Mitutoyo (Digimatic) and $\pm 2\text{Vdc}$ analog

Power: Battery or direct AC operation. Universal Power 120V/230V, Rechargeable Nickel Metal Hydride (supplied)

Battery Life: 30 hours, continuous use
Gauge may be operated with direct AC Power Source

Instrument Weight: 1.5 lbs (0.7 kg)

Operating Temperature: 40° to 100°F (4° to 38°C)

Warranty: 2 year

Automate with Nexygen Software

Your DFS can make use of our Nexygen software for gauge applications. With Nexygen software, you can perform tests and graph results automatically using a personal computer. Load results may be shown graphically versus time. Tabular results are displayed and can be used to create relationships, queries or used to produce reports. You can format the display to match your requirements and establish pre- and post-test questions that require the operator to answer questions based on the test setup. Setup is easy too. Menus, radio buttons and prompts guide you through instrument and test setup. Since Nexygen software is OLE2 compatible, information can be exchanged transparently with Microsoft Word, Excel, Access, PowerPoint and Outlook. You won't find a more comprehensive gauge software package!



Ordering

DFS Series with Integral Load Sensor

| Model | ozf | gf | lbf | kgf | N |
|----------|------------|------------|--------------|------------|--------------|
| DFS-250G | 8 x 0.004 | 250 x 0.05 | 0.5 x 0.0001 | - | 2.5 x 0.0005 |
| DFS-002 | 32 x 0.004 | 1000 x 0.1 | 2 x 0.0002 | 1 x 0.0001 | 10 x 0.001 |
| DFS-010 | 160 x 0.02 | 5000 x 0.5 | 10 x 0.001 | 5 x 0.0005 | 50 x 0.005 |
| DFS-025 | 400 x 0.05 | 10,000 x 1 | 25 x 0.002 | 10 x 0.001 | 100 x 0.01 |
| DFS-050 | 800 x 0.1 | 25,000 x 2 | 50 x 0.005 | 25 x 0.002 | 250 x 0.02 |
| DFS-100 | 1600 x 0.2 | 50,000 x 5 | 100 x 0.01 | 50 x 0.005 | 500 x 0.05 |
| DFS-200 | 3200 x 0.4 | - | 200 x 0.02 | 100 x 0.01 | 1000 x 0.1 |
| DFS-500 | 8000 x 1 | - | 500 x 0.05 | 250 x 0.02 | 2500 x 0.2 |

Note: Gauge is supplied with a 120V Charger/Adapter and US Mains Plug.
 Use the following prefixes if you require a UK or EU Mains Plug.
 -UK 230V UK Style Mains Plug (Example: DFS-100-UK)
 -EU 230V EU Style Mains Plug (Example: DFS-050-EU)

DFS Series Accessories

| Item | Capacity | Part No. | Included |
|--------------------------------------|------------------|---------------|-----------------------|
| Carrying Case | | SPK-DF-118 | Standard |
| Chisel | 100 lbf (500 N) | SPK-FMG-008A | Standard ¹ |
| Chisel | 500 lbf (2500 N) | SPK-FMG-008B | Standard ¹ |
| Point | 100 lbf (500 N) | SPK-FMG-009A | Standard ¹ |
| Point | 500 lbf (2500 N) | SPK-FMG-009B | Standard ¹ |
| Notch | 100 lbf (500 N) | SPK-FMG-010A | Standard ¹ |
| Notch | 500 lbf (2500 N) | SPK-FMG-010B | Standard ¹ |
| Flat | 100 lbf (500 N) | SPK-FMG-011A | Standard ¹ |
| Flat | 500 lbf (2.5 kN) | SPK-FMG-011B | Standard ¹ |
| Hook, Stationary | 50 lbf (225 N) | SPK-FMG-012A | Standard ¹ |
| Hook, Stationary | 100 lbf (500 N) | SPK-FMG-012B | Standard ¹ |
| Hook, Stationary | 500 lbf (2.5 kN) | SPK-FMG-012C | Standard ¹ |
| Extension Rod, 6-inch | 100 lbf (500 N) | SPK-FMG-013A | Standard ¹ |
| Extension Rod, 6-inch | 500 lbf (2.5 kN) | SPK-FMG-013B | Standard ¹ |
| Battery Charger, 120V, US Mains Plug | | SPK-DF-US | Standard ¹ |
| Battery Charger, 230V, EU Mains Plug | | SPK-DF-EU | Standard ¹ |
| Battery Charger, 230V UK Mains Plug | | SPK-DF-UK | Standard ¹ |
| Handle Assembly | | SPK-DF-HANDLE | Optional |

Note: ¹ Accessories are Model dependent.
 100 lbf (500 N) capacities and below use a #10-32 fitting
 200 and 500 lbf (1 kN and 2.5 kN) capacities use a 5/16-18 fitting



DFS Series force gauge shown with a TCD200 digital tester.

TCM-TCD Compatibility

The DFS gauge is compatible with Chatillon TCM motorized testers and TCD digital testers. The universal backplate design is compatible with Chatillon testers and helps ensure proper sample alignment.


Test Stand Adapters

| Item | Capacity | Part No. | Included |
|-----------------|------------------|---------------|----------|
| MT150 Series | 150 lbf (660 N) | SPK-MT-0001 | Optional |
| MT500 Series | 500 lbf (2500 N) | SPK-MT-0004 | Optional |
| LTCM-100 Series | 100 lbf (500 N) | SPK-DF-LTCM | Optional |
| TT Tester | 500 lbf (2500 N) | NC002582 | Optional |
| TCM201 Series | 225 lbf (1000 N) | SPK-FM200-019 | Optional |
| TCD200 Series | 225 lbf (1000 N) | SPK-FM200-019 | Optional |

Interface Cables, Adapters and Software

| Item | Part No. | Included |
|-------------------------|------------|----------|
| RS232 Cable (6 ft, 2m) | NC000850-1 | Standard |
| RS232 Cable (10 ft, 3m) | NC000850-2 | Optional |
| Mitutoyo Cable, 10-Pin | NC000654 | Optional |
| Mitutoyo Cable, RS232 | NC000697 | Optional |
| TCM201 Interface Cable | ENC0125 | Optional |
| TCD200 Interface Cable | NC000647 | Optional |
| RS232-USB Adapter | SPK-DF-USB | Optional |
| NEXYGEN Gauge Software | 40/0739 | Optional |

Dimensions

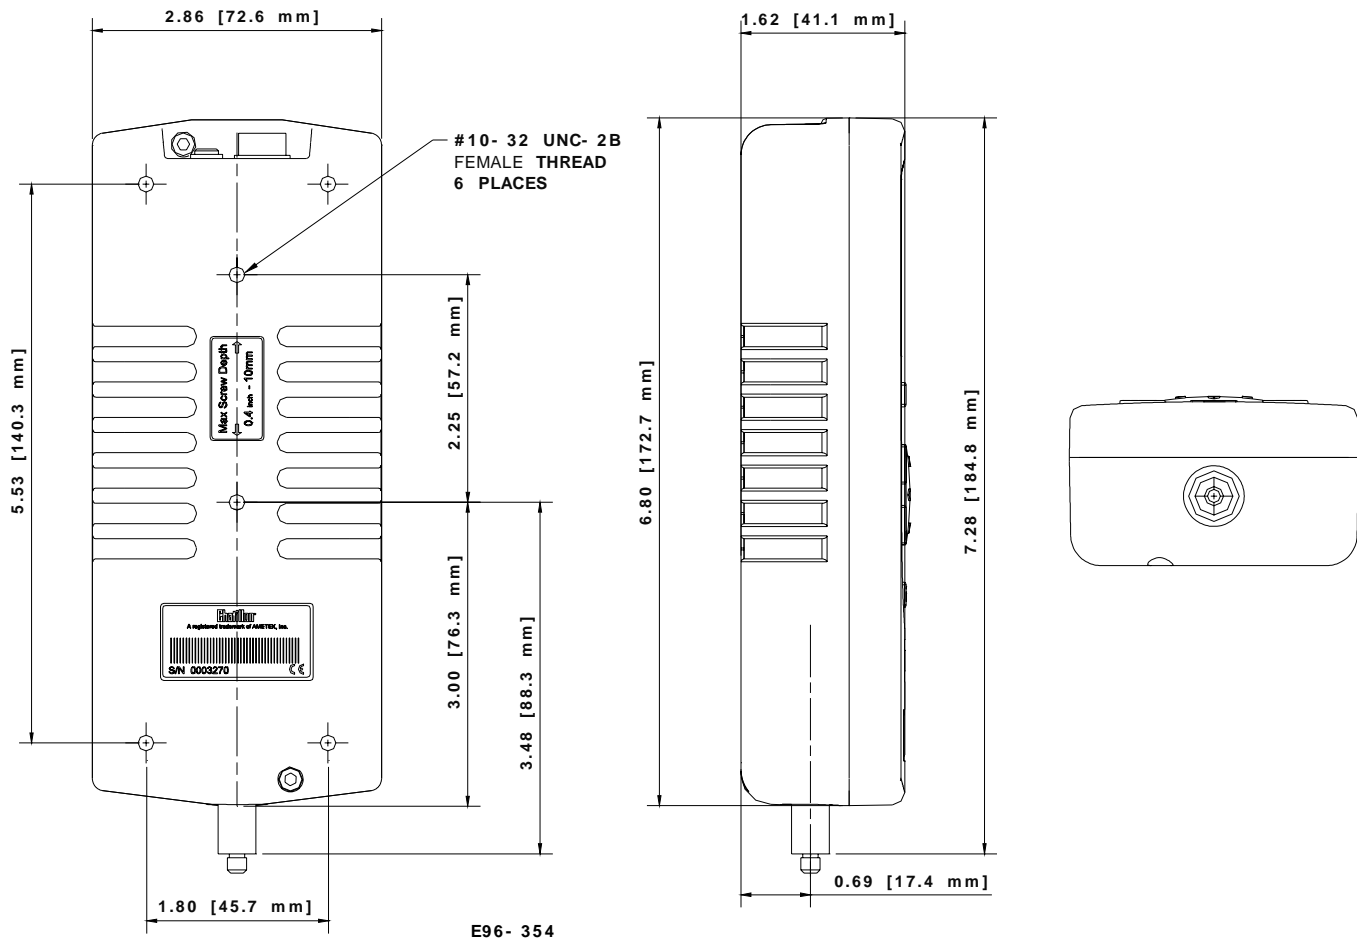

AMETEK TEST AND CALIBRATION INSTRUMENTS

For the authorized Chatillon Distributor or Manufacturer's Representative near you, go to www.chatillon.com

Americas
AMETEK TCI Division
8600 Somerset Drive
Largo, Florida 33773
United States of America
Tel +1-727-536-7831
Tel +1-800-527-9999
Fax +1-727-539-6882
Email chatillon.fl-lar@ametek.com

France
AMETEK Lloyd Instruments SAS
3 avenue des Coudriers
Zone d'Activite de l'Observatoire
78180 Montigny-Le-Bretonneux
France
Tel +33-1-3057-4774
Fax +33-1-3057-5033
Email general@lloyd-instruments.com

Germany
AMETEK Precision Instruments
Europe GmbH
Rudolf-Diesel-Strasse 16
D-40670 Meerbusch
Germany
Tel +49-0-2159-9136-70
Fax +49-0-2159-9136-80
Email apie@ametek.dr

Singapore
AMETEK Singapore Pvt. Ltd.
10 Ang Mo Kio Street 65
#05-12 Techpoint
Singapore 569059
Tel +65-484-2388
Fax +65-481-6588
Email aspl@ametek.com.sg

United Kingdom
AMETEK Lloyd Instruments Ltd.
Forum House, 12 Barnes Wallis Rd
Segensworth East
Fareham
Hampshire PO15 5TT
United Kingdom
Tel +44-0-1489-574221
Fax +44-0-1489-885118
Email general@lloyd-instruments.co.uk

Visit Us on the Worldwide Web at:
www.chatillon.com

© 2004 by AMETEK, Inc.
Information within this document is subject to change without notice.



ISO 9001/2000
ISO/IEC17025
Manufacturer